



Weyn-Lauwers N.V.

Industriepark-Noord 12
B - 9100 SINT-NIKLAAS

Tel. : 00 32 (0)3 776.34.13
Fax : 00 32 (0)3 778.09.52
weynlauwers@weynlauwers.be
www.weynlauwers.be

Y-STRAINER SS316 - FF FIG 804





DESIGN FEATURES

- stainless steel Y-strainer PN40
- max. temp : -30°C +240°C
- specifications :
 - max. working pressure 40 bar
 - thread ends gas female-female cylindric BSP
 - stainless steel screen, 1 mm



MATERIALS

item	Part name	Material
1	body	SS316 CF8M
2	filter	SS316 CF8M
3	gasket	PTFE
4	cap	SS316 CF8M

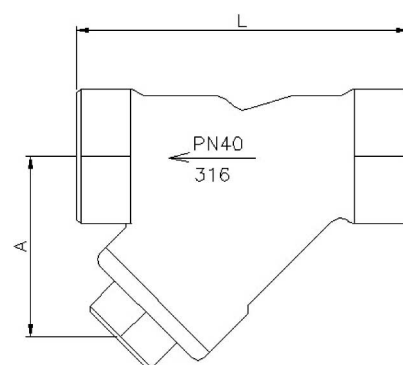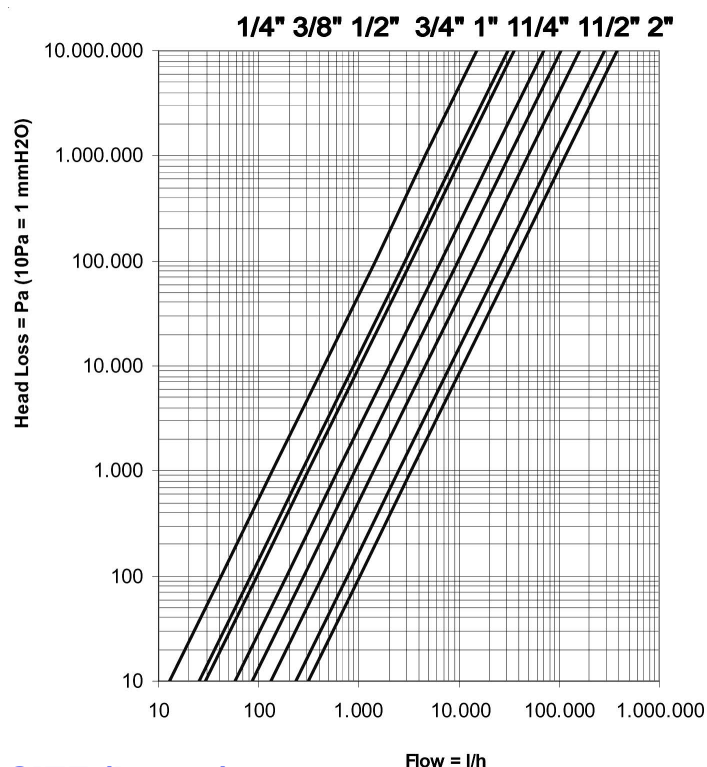

SIZE (in mm)

DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"			
PN	40	40	40	40	40	40	40	40			
A	30	30	40	45	55	65	70	85			
L	65	65	65	80	90	105	120	140			
d	1	1	1	1	1	1	1	1			
e	1	1	1	1	1	1	1	1			
kg	0,29	0,21	0,22	0,35	0,66	0,77	1,15	1,76			
ref.	804.02	804.03	204202	204203	204204	204205	204206	204207			
Kv (m3/h)	1,44	2,88	3,30	6,60	9,70	14,90	26,60	35,40			