



Weyn-Lauwers N.V.

INDUSTRIEPARK-NOORD 12
B - 9100 SINT-NIKLAAS

TEL. 0032 (0)3 776.34.13
FAX. 0032 (0)3 778.09.52
weynlauwers@weynlauwers.be
www.weynlauwers.be

GLOBE VALVE


ANSI 150 lbs

ASTM A216 WCB

fig 440

ANSI-VENTILE
ANSI-GLOBE VALVE

150 LBS

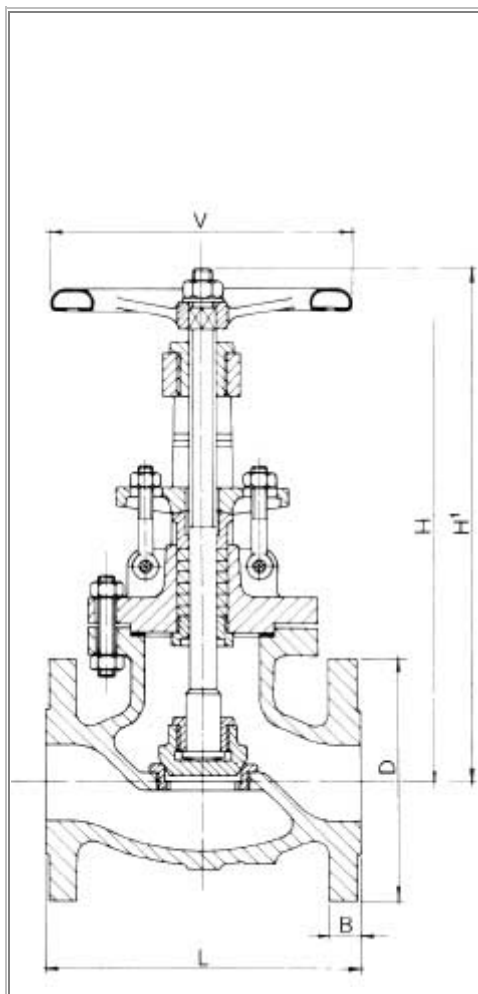

BESCHREIBUNG
DESIGN NACH API 600-
STANDARD
TESTS NACH API 598 STANDARD
BAULÄNGE NACH ANSI B16.10
FLANSCH NACH ANSI B 16.5

TESTS
HYDRAULISCH:
GEHÄUSE 425 PSIG (29,9BAR)
SITZE 275 PSIG (19,3 BAR)
LUFT:
SITZE 60-100 PSIG (4,2-7 BAR)

DESCRIPTION
DESIGN PER API 600 STANDARDS
TESTS PER API 598 STANDARDS
F-TO-F DIMENSIONS ANSI B16.10
FLANGED ENDS ACC. TO ANSI B 16.5

TESTS
HYDRAULIC TEST PRESSURE:
BODY 425 PSIG
SEATS 275 PSIG
AIR TEST PRESSURE:
SEATS 60-100 PSIG

BESCHREIBUNG	MATERIAL
BODY	A216WCB
BONNET	A216WCB
DISC	A182F6 >13% Cr- FACED
SEAT RING	A182F6
STEM	A182 F6
BACK SEAT	A182F6
GLAND	CARBON STEEL
GLAND FLANGE	A105

BESCHREIBUNG	MATERIAL
YOKE SLEEVE	NI-RESIST
HANDWHEEL	CARBON STEEL
BONNET GASKET	ASBESTOS-FREE
STEM PACKING	GRAPHITED
BONNET STUD /BOLT NUTS	A193 B7-A194 2H
EYEBOLT / NUTS	CARBON STEEL
YOKE SLEEVE NUT	CARBON STEEL
HANDWHEEL NUT	CARBON STEEL

DN	40	50	65	80	100	150	200	250	300	350	400
INCH	1 1/2	2	2 1/2	3	4	6	8	10	12	14	16
L	165	203	216	241	292	406	495	622	699	787	914
D	127	152	178	191	229	280	343	406	483	533	597
B	14,5	16	17,5	19	24	25,5	28,5	30,5	32	35	36,5
H	265	290	330	360	400	500	570	630	710	830	970
H ¹	295	325	370	410	465	575	655	740	840	980	1120
V	175	200	200	225	250	300	400	450	500	600	720

ABBILDUNGEN UND MATERIALANGABEN SIND UNVERBINDLICH
DESIGN AND MATERIALS CAN BE CHANGED WITHOUT NOTICE
IRRTUM VORBEHALTEN - ERRORS AND OMISSIONS EXCEPTED
REL.281200