



Weyn-Lauwers N.V.

Industriepark-Noord 12
B - 9100 SINT-NIKLAAS

Tel. : 00 32 (0)3 776.34.13
Fax : 00 32 (0)3 778.09.52
weynlauwers@weynlauwers.be
www.weynlauwers.be

PRESSURE TRANSMITTER STAINLESS STEEL

DESIGN FEATURES

- thread 1/2" G
- out : 4 - 20 mA (2 wire)
- supply : 12 - 36 VDC
- precision : 0,5 % fs
- over pressure : 1,5 x fs
- electric connection : DIN 43650A (solenoid 4 poles)
- protection : IP65
- free of oil
- measurement range : -1 to +500 bar
- material : stainless steel
- working temperature : -40 to +80°C






USE


- applications in food and pharmaceutical machines
- in all process controls
- pressure liquids and gases
- pumps
- compressors

MATERIALS


all parts in contact with the environment are built in stainless steel

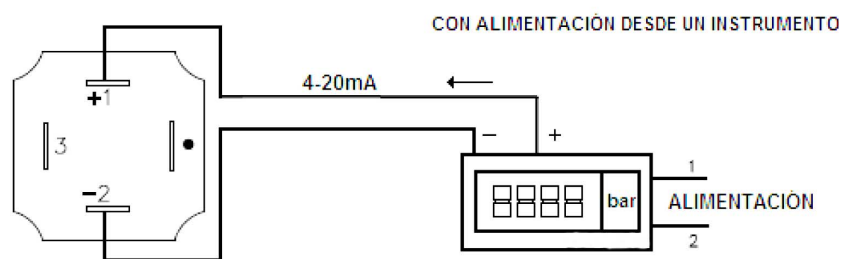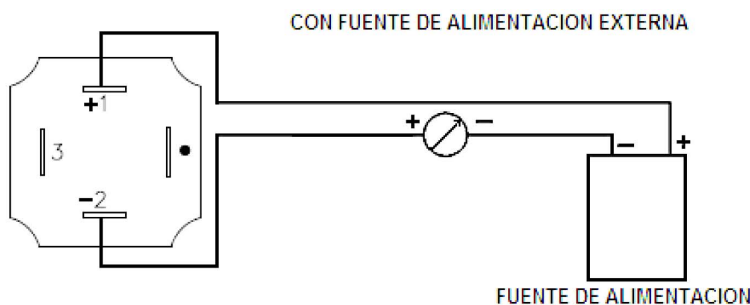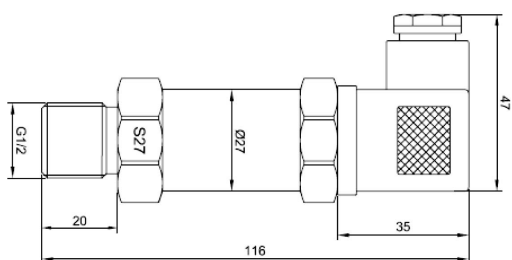

ref.	bar
8080 101	-1 +1
8080 003	0 +3
8080 005	0 + 5
8080 010	0 +10
8080 016	0 +16
8080 025	0 +25
8080 050	0 +50
8080 100	0 +100
8080 250	0 +250
8080 500	0 +500



Conector 4 polos
DIN 43650

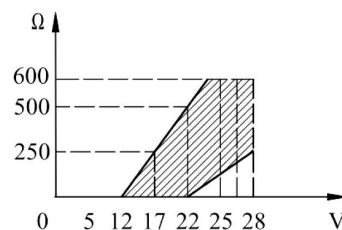

Load diagram