



Weyn-Lauwers N.V.

Industriepark-Noord 12
B - 9100 SINT-NIKLAAS

Tel. : 00 32 (0)3 776.34.13
Fax : 00 32 (0)3 778.09.52
weynlauwers@weynlauwers.be
www.weynlauwers.be

BALL CHECK VALVE BSP fig 770

DESIGN FEATURES


- ball check valve 1"-3" PN10
- threaded BSP
- min. temp : -10°C
- max. temp : +80°C
- specifications : ball type
epoxy blue painting
removable bonnet

USE


- water distribution and watering
- max. pressure : 10 bar

MATERIALS

item	Part name	Material
1	body	ductile iron GJS 400
2	bonnet	ductile iron GJS 400
3	ball 1"-1 1/2"	NBR
3	ball 2" - 3"	aluminum/NBR
4	bonnet gasket	NBR
5	bolting	SS 304

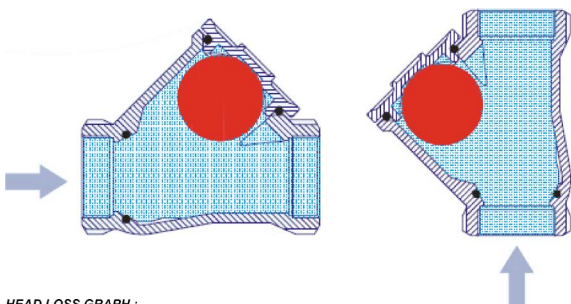

HEAD LOSS GRAPH :

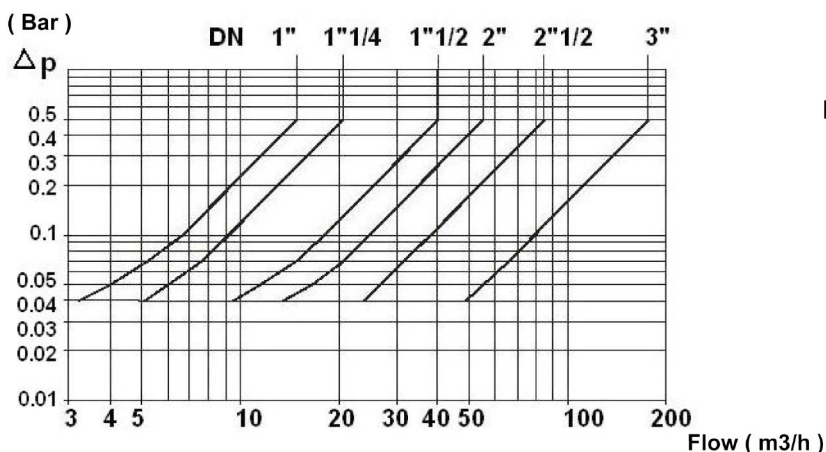

DN	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
L	141	141	150	175	214	248
H	85	85	90	115	135	160
A	110	110	120	140	155	185
kg	1,8	2	3	4,8	6,2	12
ref.	206744	206745	206746	206747	206748	206749

