

Weyn-Lauwers N.V.

Industriepark-Noord 12
B - 9100 SINT-NIKLAAS

Tel. : 00 32 (0)3 776.34.13
Fax : 00 32 (0)3 778.09.52
weynlauwers@weynlauwers.be
www.weynlauwers.be

BALL CHECK VALVE PN10 fig 772

DESIGN FEATURES



- **ball check valve** dn40 - dn400 PN10
- temp : -10°C +80°C
- specifications :
 - ball type
 - epoxy blue painting
 - removable bonnet
 - flanges ISO PN10/16
 - vertical or horizontal installation

USE



- water distribution and watering
- max. pressure : 10 bar

MATERIALS

item	Part name	Material
1	body	ductile iron GJS400
2	bonnet	ductile iron GJS400
3	ball dn40	NBR
3	ball dn50-80	aluminium/NBR
3	ball dn100-400	A216WCB/NBR
4	bonnet gasket	NBR
5	bolting	SS 304

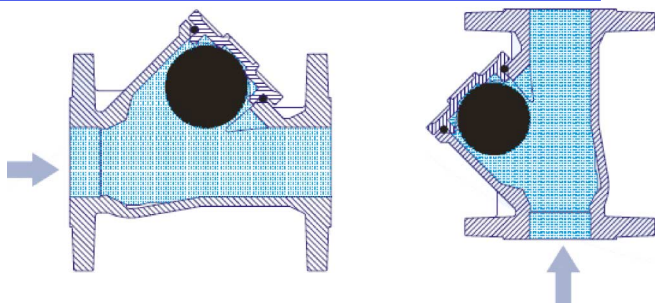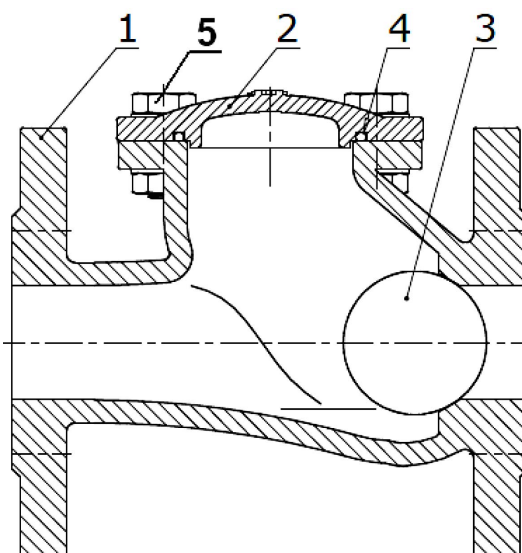

HEAD LOSS GRAPH:

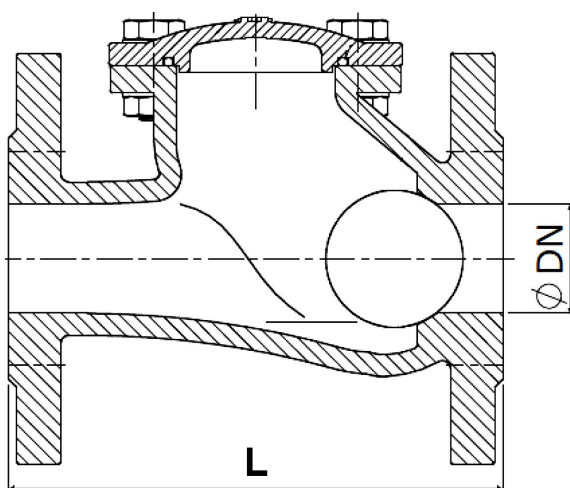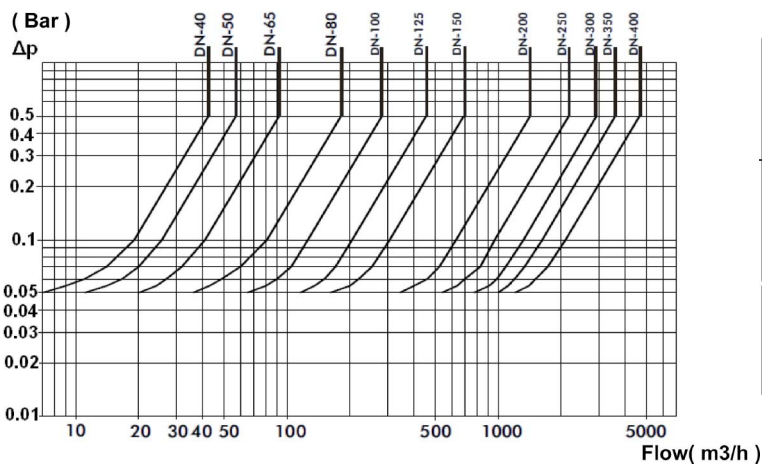

SIZE (in mm)

DN	40	50	65	80	100	125	150	200	250	300	350	400		
L	178	200	240	260	300	350	400	500	600	700	800	900		
kg	6,15	9,8	17,5	20,5	25,6	42,7	42,7	103	135	192	290	450		
ref.	772.08	206736	206737	206738	206739	206740	206741	206742	206743	772.20	772.22	772.24		