



Weyn-Lauwers N.V.

Industriepark-Noord 12
B - 9100 SINT-NIKLAAS

Tel. : 00 32 (0)3 776.34.13
Fax : 00 32 (0)3 778.09.52
weynlauwers@weynlauwers.be
www.weynlauwers.be

DISC CHECK VALVE SS316 FIG 784



DESIGN FEATURES

- wafer type check valve DN15 - DN200
- assembly between flanges PN16/40 - ANSI 150
- min. : -20°C +240°C
- face to face acc. EN558-1 S.49
- specifications :
 - low head losses
 - little dimensions
 - installed with vertical, horizontal or inclined flow
 - max. working pressure 40/25 bar
 - single disc




MATERIALS

item	Part name	Material
1	body	CF8M (SS316)
2	spring support	SS 316
3	spring	SS 316
4	disc	CF8M (SS 316)
5	centring ring	SS 304

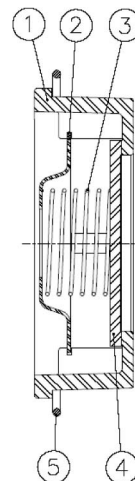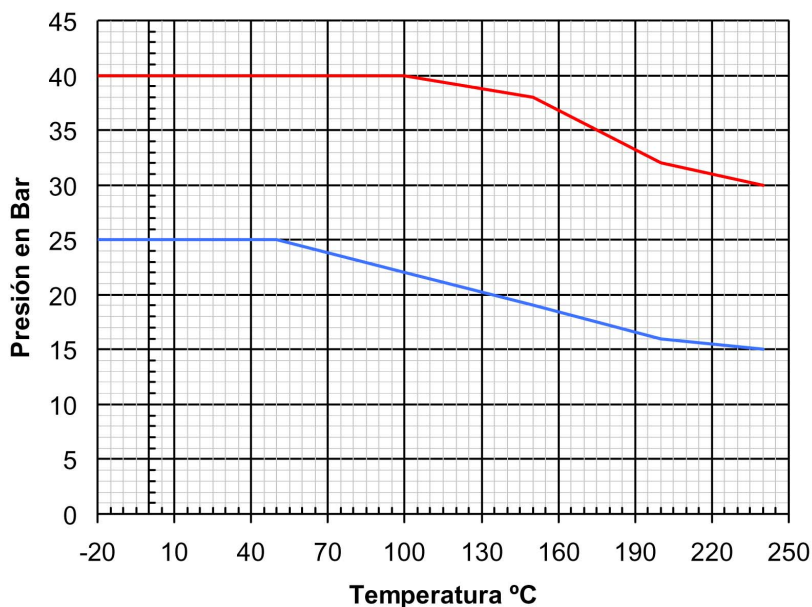


DN15~DN100

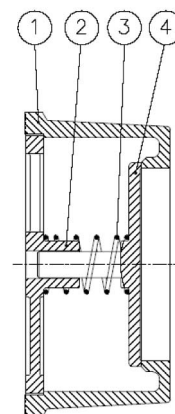

DN125~DN200

— DN ≤ 4"
— DN > 4"

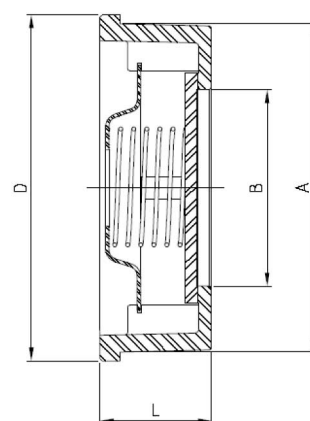

SIZE (in mm)

DN	15	20	25	32	40	50	65	80	100	125	150	200
PN	40	40	40	40	40	40	40	40	40	25	25	25
D	39	46	54	70	81	94	113	132	150	187	217	274
A	34	41	49	62	71	85	102	123	140	177	205	261
B	15	20	25	32	40	48	62	75	95	118	140	185
L	16	19	22	28	32	40	46	50	60	90	106	140
kg	0,085	0,122	0,198	0,380	0,520	0,775	1,240	1,865	2,65	5,50	8,30	16,1
ref.	205260	205261	205262	205263	205264	205265	205266	205267	205268	784.13	784.14	784.16