



Weyn-Lauwers N.V.

INDUSTRIEPARK-NOORD 12
B - 9100 SINT-NIKLAAS

TEL. 0032 (0)3 776.34.13
FAX. 0032 (0)3 778.09.52
weynlauwers@weynlauwers.be
www.weynlauwers.be

TERUGSLAGKLEP GG 25 - pn 16 fig 787 ZEEF fig 850

TERUGSLAGKLEP PN 16 fig 787

KENMERKEN

- PN 16
- Temp. -10°C +100°C

MATERIALEN

- huis : GG25
- disc : GG25
- geleiding : dn 50 - 80 messing
- : dn 100 - 250 GG25
- steun : messing
- dichting : NBR

AFMETINGEN (in mm)

DN	diam.	A	B	C	D
50	50	80	165	100	111
65	65	100	185	120	131
80	80	120	200	140	148
100	100	150	220	170	168
125	125	175	250	200	198
150	150	200	285	230	222
200	200	250	340	300	332
250	250	300	405	370	385

OPENINGSDRUK (in mm H₂O)



DN	50	65	80	100	125	150	200	250
↓	382	316	280	318	180	165		
↔	510	480	436	470	375	345		
↑	636	647	592	624	570	526		

KV-waarde

DN	50	65	80	100	125	150	200	250
KV	90	138	228	354	486	603	1080	1770

SAMENBOUW met fig 850

- zeef in staal verzinkt

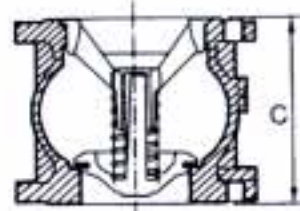

DRUKVERLIES-DIAGRAMMA

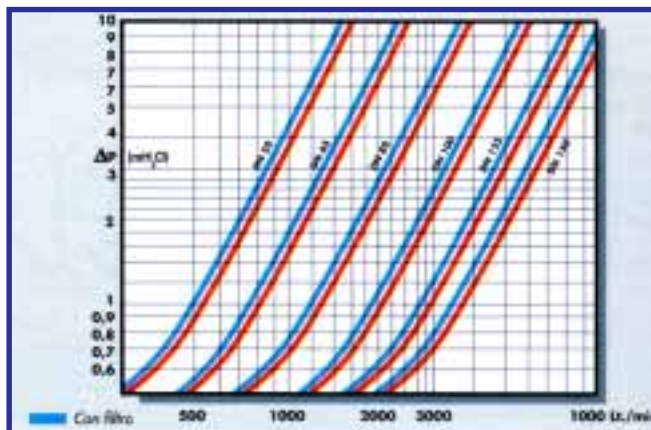


fig 850

