



Weyn-Lauwers N.V.

Industriepark-Noord 12
B - 9100 SINT-NIKLAAS

Tel. : 00 32 (0)3 776.34.13
Fax : 00 32 (0)3 778.09.52
weynlauwers@weynlauwers.be
www.weynlauwers.be

**CHECK VALVE PN400
HIGH PRESSURE
BSP - AISI 316
FIG T388**

DESIGN FEATURES

- high pressure check valve 1/4"-1" PN400
- threaded BSP (fig T389 for NPT)
- min. temp : -20°C
- max. temp : +180°C
- specifications : ball type
 female/female
 metal/metal
 opening pressure 1 bar




USE

- for all common fluids
- max. pressure : 400 bar

MATERIALS

item	Part name	Material
1	body	SS316
2	seat	SS316 stellite
3	ball	SS 316
4	guide	SS316
5	gasket	viton
6	spring	SS 304
7	end cap	SS 316

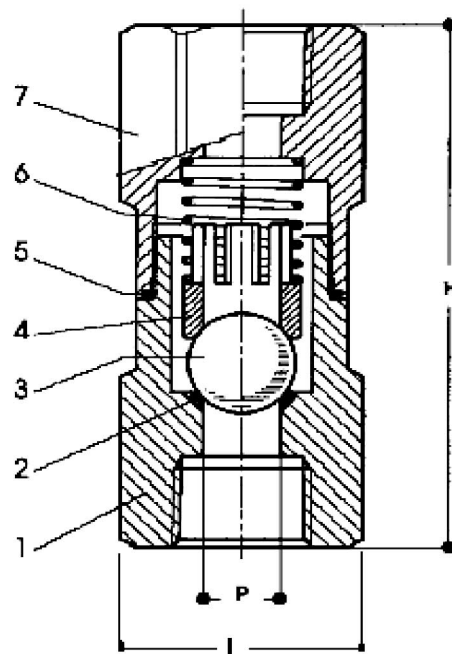

SIZE (in mm)

DN	1/4"	3/8"	1/2"	3/4"	1"
P	8	8	10	14	16
H	90	90	90	130	140
L	32	32	32	41	50
kg	0,50	0,50	0,50	0,95	1,90
ref.	T388.02	T388.03	T388.04	T388.05	T388.06